

Specifications — AC Net AAP

General

Power

AC Net AAP USA model . 125 VAC, 50/60 Hz, 5 A (max.), unswitched

AC Net AAP World models

220-240 VAC, 50/60 Hz, 5 A (max.), unswitched

Temperature/humidity Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing
 Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing

Rack mount Yes, with optional faceplates or mounting frames; also furniture mountable with optional AAP mounting frames

Enclosure type Metal

Enclosure dimensions

AC Net AAP USA model


Faceplate 1.4" H x 3.5" W x 0.1" D (3.5 cm H x 8.9 cm W x 0.3 cm D) (double space AAP plate)

Isolation enclosure 1.2" H x 1.4" W x 2.9" D (3.0 cm H x 3.6 cm W x 7.4 cm D)
 With AC power cord attached, allow at least 5.0" (12.7 cm) depth in furniture.


AC Net AAP World models

Faceplate 2.1" H x 3.5" W x 0.1" D (5.3 cm H x 8.9 cm W x 0.3 cm D) (three space AAP plate)

Isolation enclosure 1.9" H x 1.8" W x 3.0" D (4.9 cm H x 4.6 cm W x 7.7 cm D)
 With AC power cord attached, allow at least 5.0" (12.7 cm) depth in furniture.

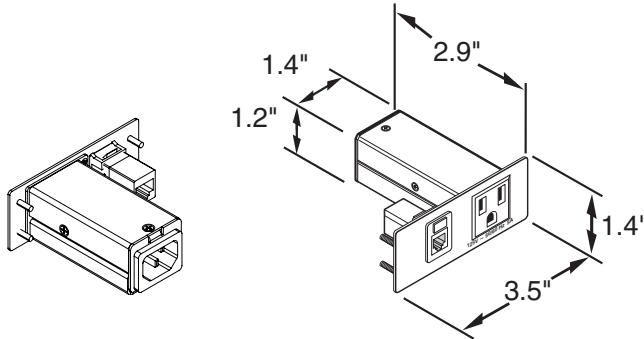

**AC Net AAP
USA model**

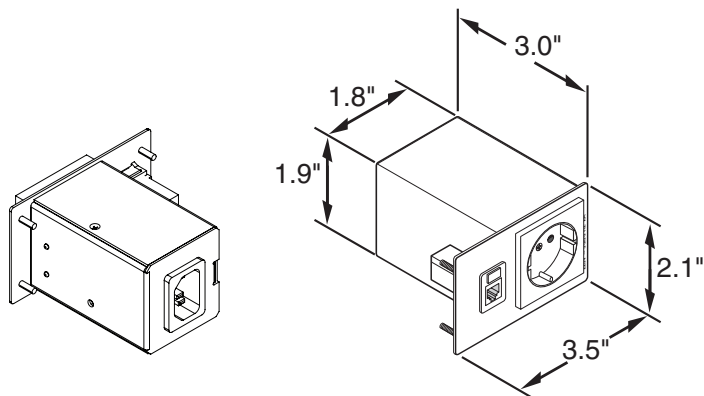

**AC Net AAP
World models**

Specifications — AC Net AAP, cont'd

Product weight
AC Net AAP USA model . 0.2 lbs (0.1 kg)
AC Net AAP World models
0.5 lbs (0.2 kg)

Shipping weight 1 lbs (1 kg)

Vibration..... ISTA 1A in carton (International Safe Transit Association)

Listings (AC Net AAP USA)..... UL, CUL

Compliances
AC Net AAP World models
CE, RoHS

MTBF..... 30,000 hours

Warranty 3 years parts and labor

NOTE All nominal levels are at $\pm 10\%$.

NOTE Specifications are subject to change without notice.

7.6-091908-D4